


# 1442

## Roller Latch with Full Lip Strike

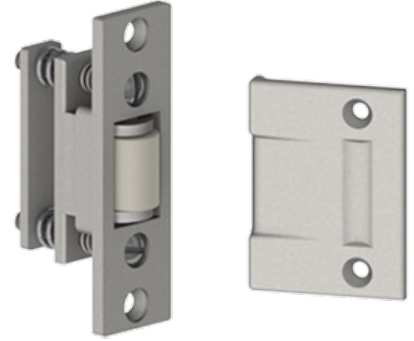

### PRODUCT SPECIFICATIONS

**ROLLER FACEPLATE:**

- 1" x 3 3/8" (25 mm x 86 mm)

**STRIKE:**

- 1-11/16" x 2-1/4" (43 mm x 57 mm)

**STRIKE GAUGE:**

- 5/32" (4 mm)

**MATERIAL:**

- Brass

**FINISHES:**

- US3\*, US4, US10, US10B\*, US15\*, US15A, US19, US26, US26D\*
- \* Available with nonferrous (NF) components - must specify NF

**STRIKE:**

- 1-11/16" x 2-1/4" x 5/32" thick

**FASTENERS:**

- Two (2) #8 x 1" FPHWS
- Two (2) #8 - 32 x 3/4" FPHMS
- Two (2) #10 x 1-1/2" FPHWS

**CERTIFICATIONS:**

- Meets ANSI A156.16 for E09091

**OPTIONS:**

- Non-Ferrous version available with extended lead time

**NOTES:**

- Adjustable spring tension with nylon roller
- Projection of roller is easily adjusted using screws on faceplate
- Max projection of the roller is 3/8" (10 mm) allowing for variance in door and frame clearance