


1251

Single Acting
1/4" Radius

Application:

- For maximum versatility, use all spring hinges or a combination of spring and ball bearing hinges. Do not use plain bearing hinges.
- Strong wind conditions, drafts, carpeting drag, twisted/misaligned frames, or weatherstripping on doors may require additional spring hinges

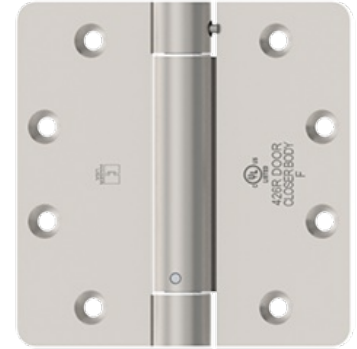

PRODUCT SPECIFICATIONS

MATERIAL:

- Steel with Steel components ANSI K81071F

FINISHES:

- USP, US3, US4, US10, US10A, US10B, US26D

NOTES:

- Hager does not recommend using spring hinges on doors over 70"

PRODUCT SIZE OPTIONS

HINGE SIZE (INCHES)	HINGE SIZE (MM)	GAUGE OF METAL	HOLE COUNT	SCREW SIZE (MACHINE)	SCREW SIZE (WOOD)
4 x 4	102 x 102	0.134	8	1/2 x 12-24	1 1/4 x 12
4 1/2 x 4	114 x 102	0.134	8	1/2 x 12-24	1 1/4 x 12