

## RC1762


### Spring Hinge

**Certifications:**

- BHMA Certified, ANSI 4156.17, Grade 1

**Application:**

- ANSI K51071F
- Round corners - 5/8" (16 mm) radius

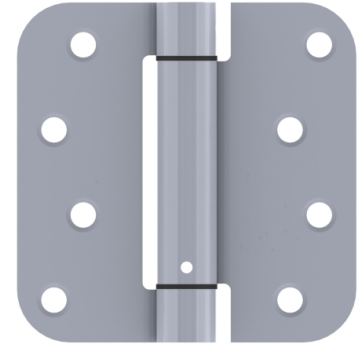

## PRODUCT SPECIFICATIONS

**MATERIAL:**

- Stainless Steel

**FINISHES:**

- US32, US32D

**PACKAGING:**

- 2 pack with screws

**NOTES:**

- For maximum versatility use all spring hinges or a combination of spring hinges and ball bearing hinges. Do not use plain bearing hinges.
- Full spring tension may not be required on all hinges
- Strong wind conditions, drafts, carpeting drag, twisted/misaligned frames, or weatherstripping on doors may require additional spring hinges

## PRODUCT SIZE OPTIONS

SIZE	GAUGE OF METAL	HOLE COUNT	SCREW SIZE (WOOD)
4 x 4 (102 x 102 mm)	0.106	8	1 x 9 FH

Size	Recommended Max Door Weight	Bearing Hinge	Spring Hinge Location
4" x 4"	45 lbs.	2	1 Center
	70 lbs.	1	2 Center/Bottom
	90 lbs.	-	3 All