



4600 NARROW STILE CONCEALED VERTICAL ROD EXIT DEVICE TEMPLATE FOR ALUMINUM DOOR AND FRAME PREP


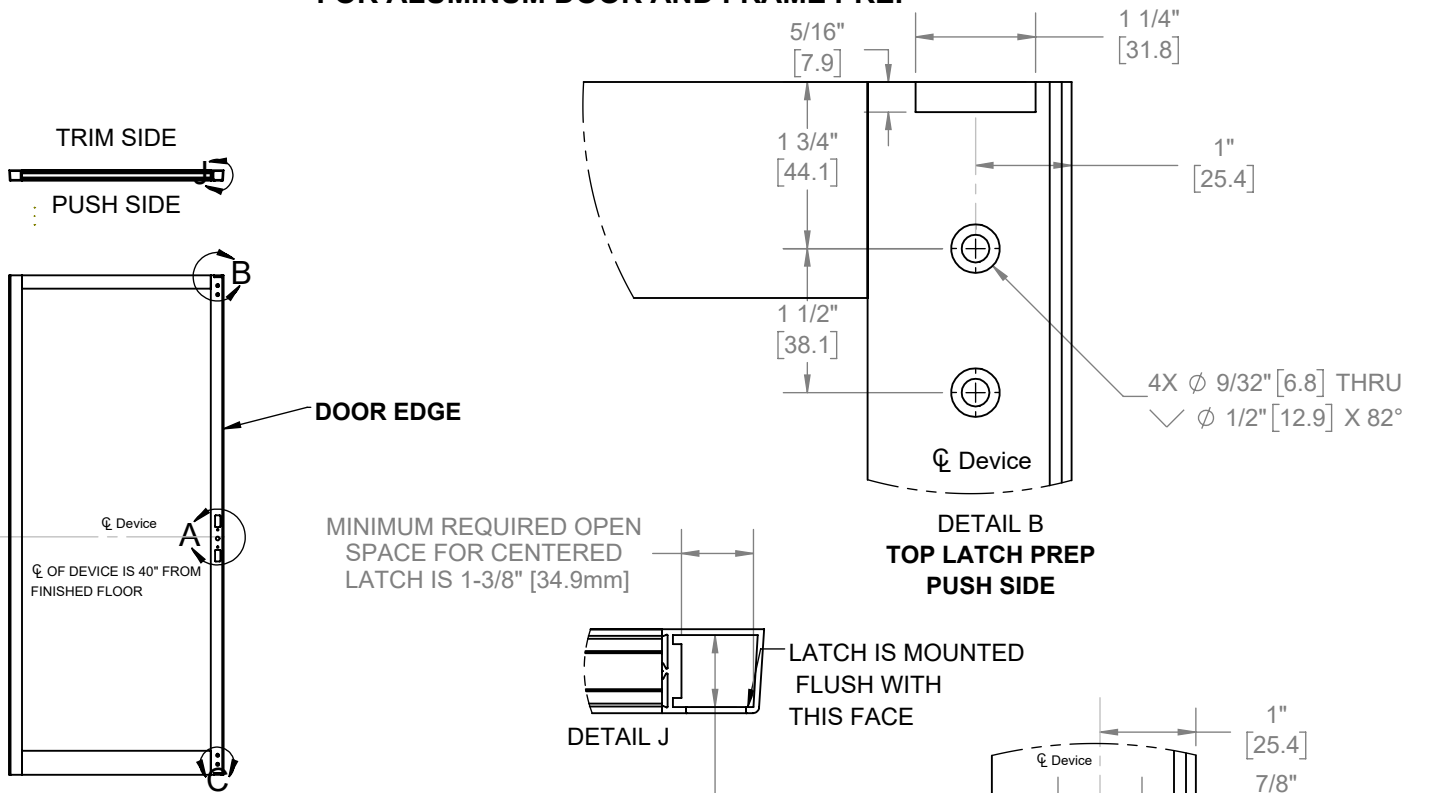


MINIMUM REQUIRED OPEN SPACE FOR CENTERED LATCH IS 1-3/8" [34.9mm]

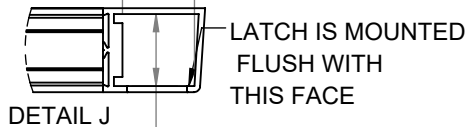

MINIMUM REQUIRED OPEN SPACE FOR LATCH IS 1-7/16" [36.5mm]

DETAIL C BOTTOM LATCH PREP PUSH SIDE

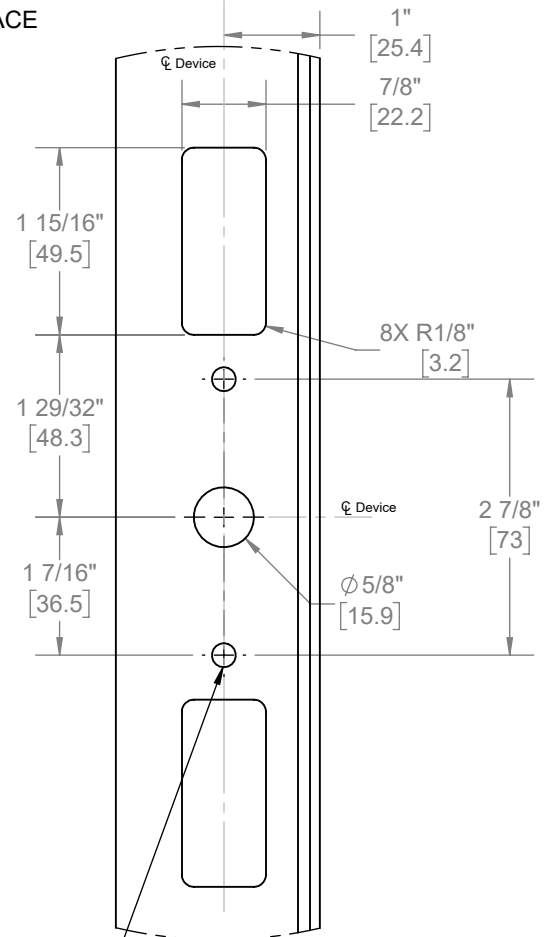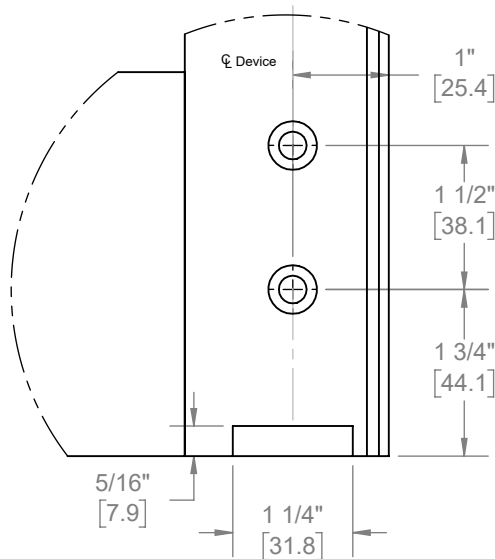

DETAIL A DEVICE LATCH PREP PUSH SIDE

TRIM MOUNTING

DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE
1/2" HOLES ON PULL SIDE

THRU BOLTING

DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE
3/8" HOLES ON PULL SIDE

SURFACE MOUNTING


DRILL AND TAP 1/4"-20




4600 NARROW STILE CONCEALED VERTICAL ROD EXIT DEVICE TEMPLATE FOR ALUMINUM DOOR AND FRAME PREP

HINGE EDGE

HEADER

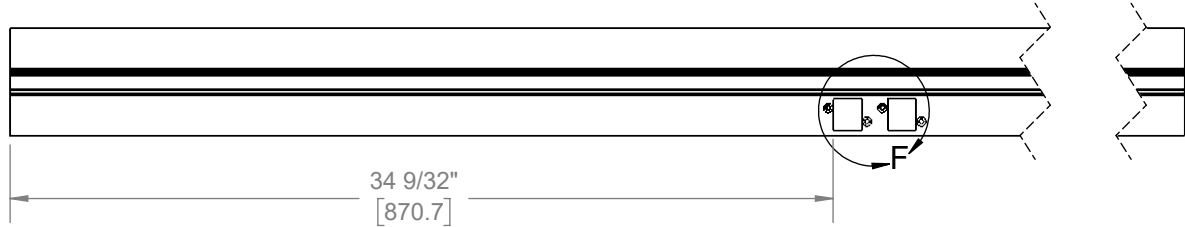

THIS DIMENSION ASSUMES A 1/4" DOOR GAP.
DUE TO VARIANCES IN DOOR DESIGNS,
STRIKE PLACEMENT MAY VARY.
STRIKE CENTERLINE SHOULD MATCH EXIT CENTERLINE.

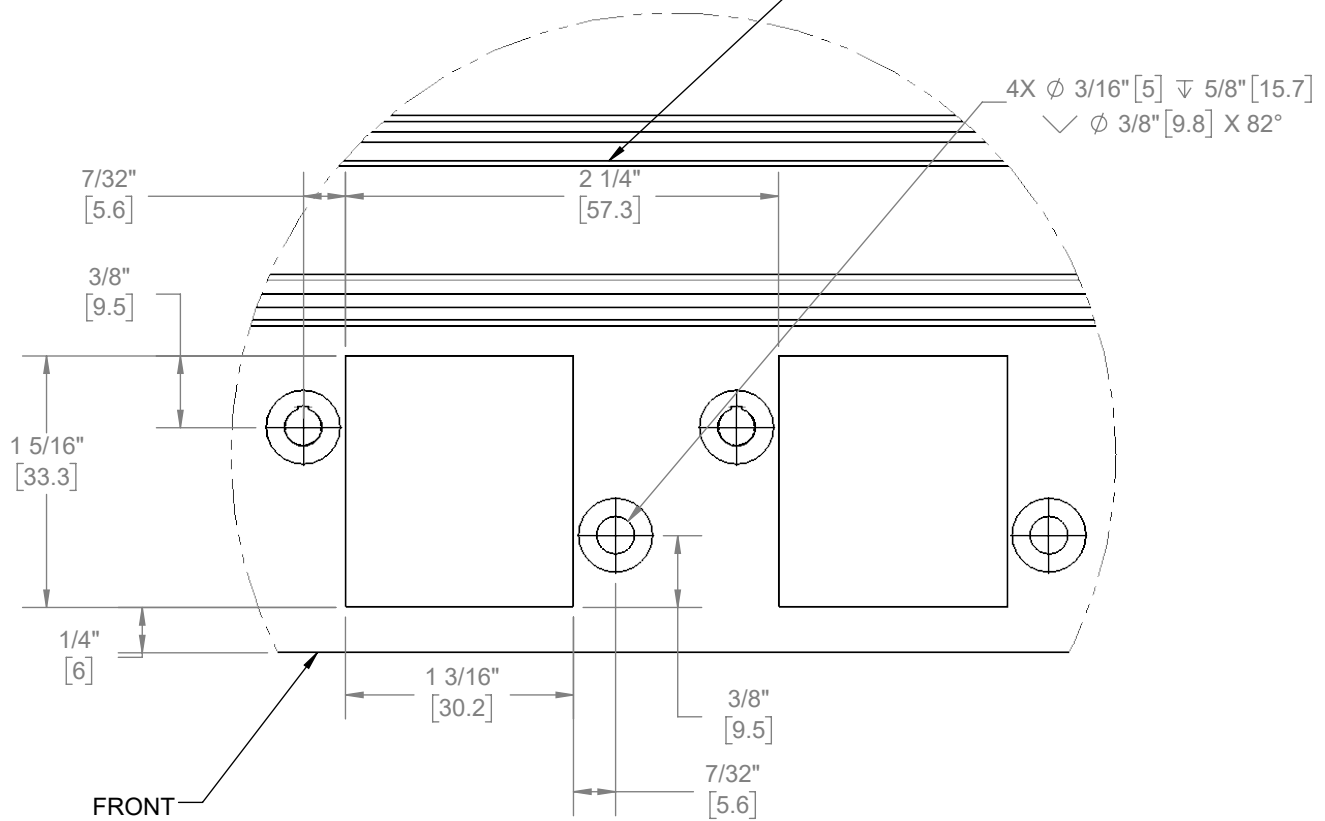

ALL DIMENSIONS ON RIGHT SIDE STRIKE PREP ARE
IDENTICAL TO LEFT SIDE STRIKE PREP.




DETAIL F
TOP STRIKE PREP



4600 NARROW STILE CONCEALED VERTICAL ROD EXIT DEVICE TEMPLATE FOR ALUMINUM DOOR AND FRAME PREP

THRESHOLD SHOWN IS A HAGER 404S.
THRESHOLD IS CENTERED ON DOOR.
BOTTOM STRIKE IS DESIGNED TO WORK WITH 1/2" TALL THRESHOLDS.

HINGE EDGE

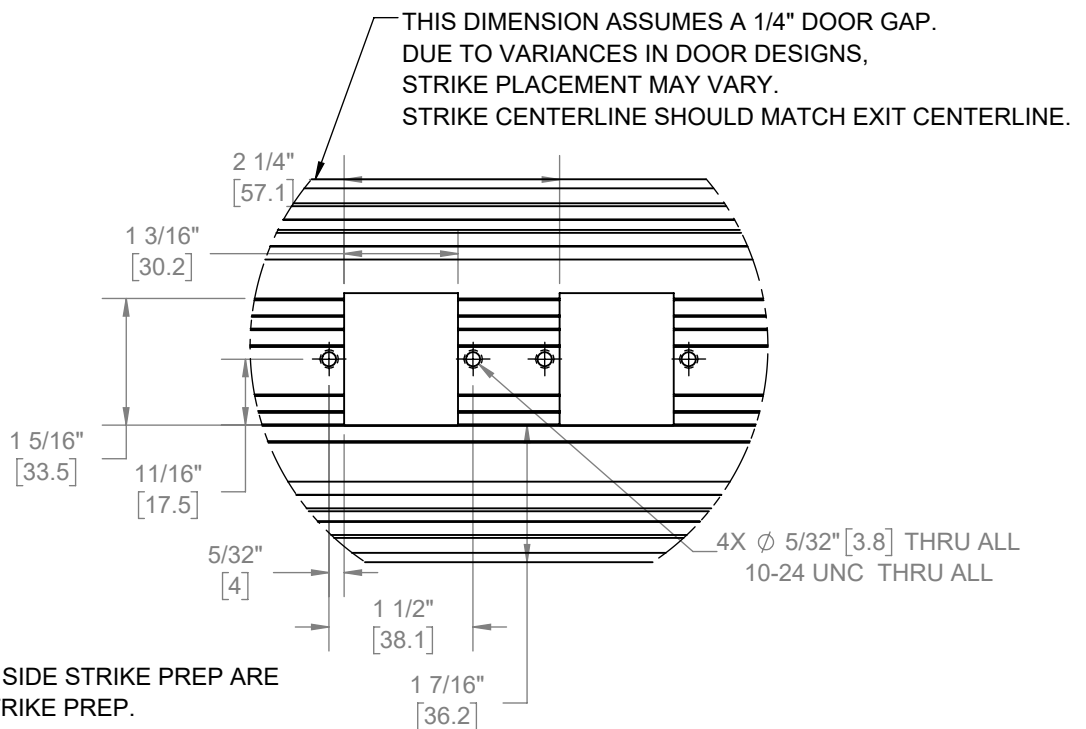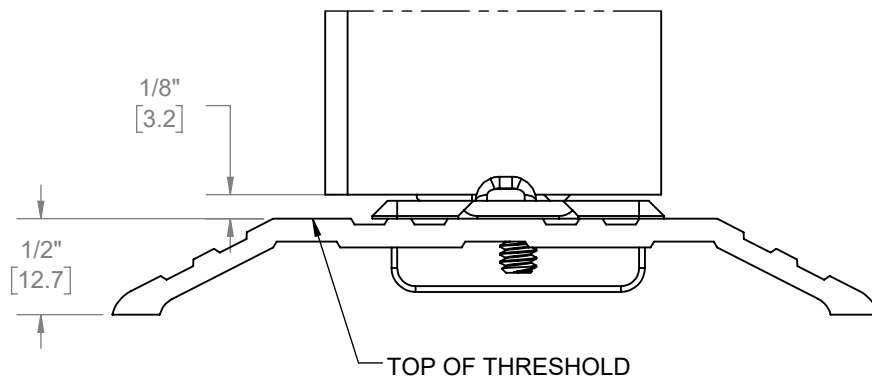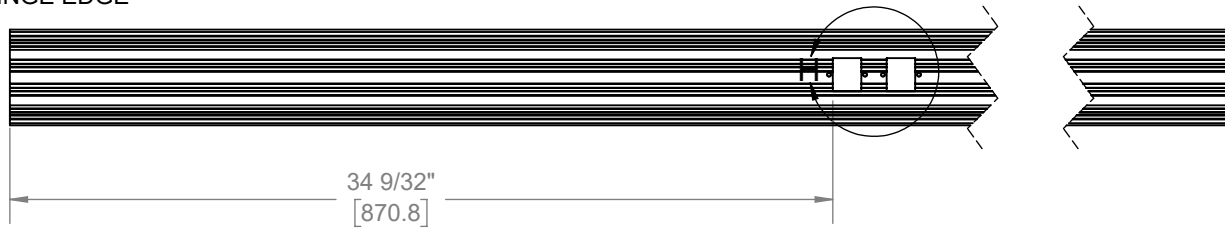

ALL DIMENSIONS ON RIGHT SIDE STRIKE PREP ARE IDENTICAL TO LEFT SIDE STRIKE PREP.

DETAIL H

BOTTOM STRIKE PREP

