8300 AUTO OPERATOR ORDERING FORM

Date:____/____/____ Customer ID:_____

Hager SO#:_____ Project:_____

Please verify the information below for the operator to be used on this project. Please check the appropriate box for the finish, arm type, and operator width per the illustrations below.

FINISH

☐ (ALM) CLEAR ANODIZED COVER WITH PLATED AND ANODIZED ARM TO MATCH ☐ (DBZ) DARK BRONZE ANODIZED COVER WITH PAINTED ARM TO MATCH

OPERATOR TYPE

SINGLE DOOR

(8318)

PUSH SIDE MOUNTING (STANDARD ARM)



☐

PULL SIDE MOUNTING (TRACK ARM)



☐

PAIR DOORS

(8319)



☐ PUSH SIDE (STANDARD ARM)

☐ PULL SIDE (TRACK ARM)

DOUBLE EGRESS

(8321)



☐ 8321 Double Egress

Only Available in ALM

OPENING WIDTH

SINGLE DOOR

☐ 36" *(Standard)* ☐ 42" ☐ 44" ☐ 48" ☐ _____ Custom

PAIR DOORS

☐ 72" ☐ 84" ☐ 88" ☐ 96" ☐ _____ Custom

OPERATOR LENGTH = DOOR OPENING WIDTH + 3"

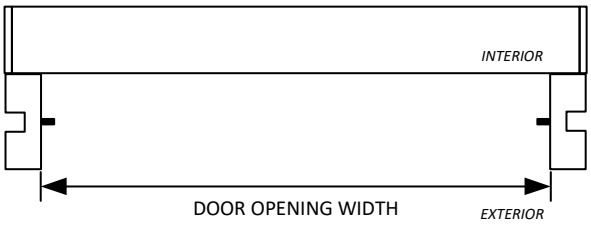

STANDARD OPERATOR SPECS

Voltage Input: 115VAC 60Hz
Current Consumption: 1A
Header Dimension: .....4-1/8" x 4-¾" (H x D)
Weight: ..... 22lbs Per Operator Assembly
Operating Temp: ..... -4 to 131 F
Ingress Protection: IP23
Voltage Output: ..... 24VDC; 1A Max
Adjustable Speeds: ..... Opening Speed
Closing Speed
Hold Open Time
Standard Outputs: ..... Malfunction Alarm Signal
24VDC Power Supply
Door Status

Standard Inputs: ..... Interior Activation
Exterior Activation
Emergency Shutdown
Alarm Output
"Stop" Safety Device
Safety Device Input

Max Reveal:
Push Arm: ..... 9-3/4"
Pull Arm: ..... 0"
Double Egress Arm: ..... 4"

Door Weights:	**Push**	**Pull**
36" Door	438lbs	342lbs
42" Door	328lbs	256lbs
44" Door	299lbs	234lbs
48" Door	254lbs	198lbs

Please direct any questions regarding this form to Hager Tech Support at techconnect@hagerco.com or call (800)-325-9995

BY SIGNING BELOW CUSTOMER AGREES THAT THIS FORM SUPERSEDES/REPLACES INFORMATION ON THE ORIGINAL PURCHASE ORDER.

CUSTOMER APPROVAL:_____**DATE:**____/____/____

DIMENSIONS AND OPERATOR HANDING VERIFIED BY CUSTOMER AND ACKNOWLEDGED BY SIGNATURE