

4600 RIM NARROW STILE EXIT DEVICE TEMPLATE
4951 SINGLE RABBIT STRIKE APPLICATION
FOR PANIC RATED EXIT HARDWARE

THIS SIDE UP FOR RHR DOOR
 (RIGHT HAND REVERSE)


FOLD ALONG THIS LINE
CAUTION
 DO NOT USE DOOR EDGE

STRIKE MOUNTING SCREWS (2 PLACES):
 Ø0.27 THRU, ∇ Ø0.51 x 82°
 COUNTERSUNK HOLE FOR #10-24 MACHINE SCREWS

DEVICE MOUNTING SCREWS (2 PLACES):
 METAL: DRILL/TAP FOR 1/4"-20 MACHINE SCREWS
 WOOD: PRE-DRILL Ø1/8" HOLES
 SEXBOLTS:
 DRILL Ø5/16" CLEARANCE HOLES ON PUSH SIDE,
 DRILL Ø3/8" HOLES ON PULL SIDE.
TRIM:
 DRILL Ø5/16" CLEARANCE HOLES ON PUSH SIDE,
 DRILL Ø1/2" HOLES ON PULL SIDE.

TRIM CLEARANCE HOLES (FOR BE & CE FUNCTIONS):
 DRILL Ø1/2" CLEARANCE HOLE ON PUSH SIDE,
 DRILL Ø3/4" HOLE ON PULL SIDE.
 (FOR NL TRIM SEE INSTRUCTIONS/TEMPLATES FOR DETAILS)

END CAP MOUNTING SCREWS (2 PLACES):
 METAL: DRILL/TAP FOR 1/4"-20 MACHINE SCREWS
 WOOD: PRE-DRILL Ø1/8" HOLES
 SEXBOLTS:
 DRILL Ø5/16" CLEARANCE HOLE ON PUSH SIDE,
 DRILL Ø3/8" HOLES ON PULL SIDE.

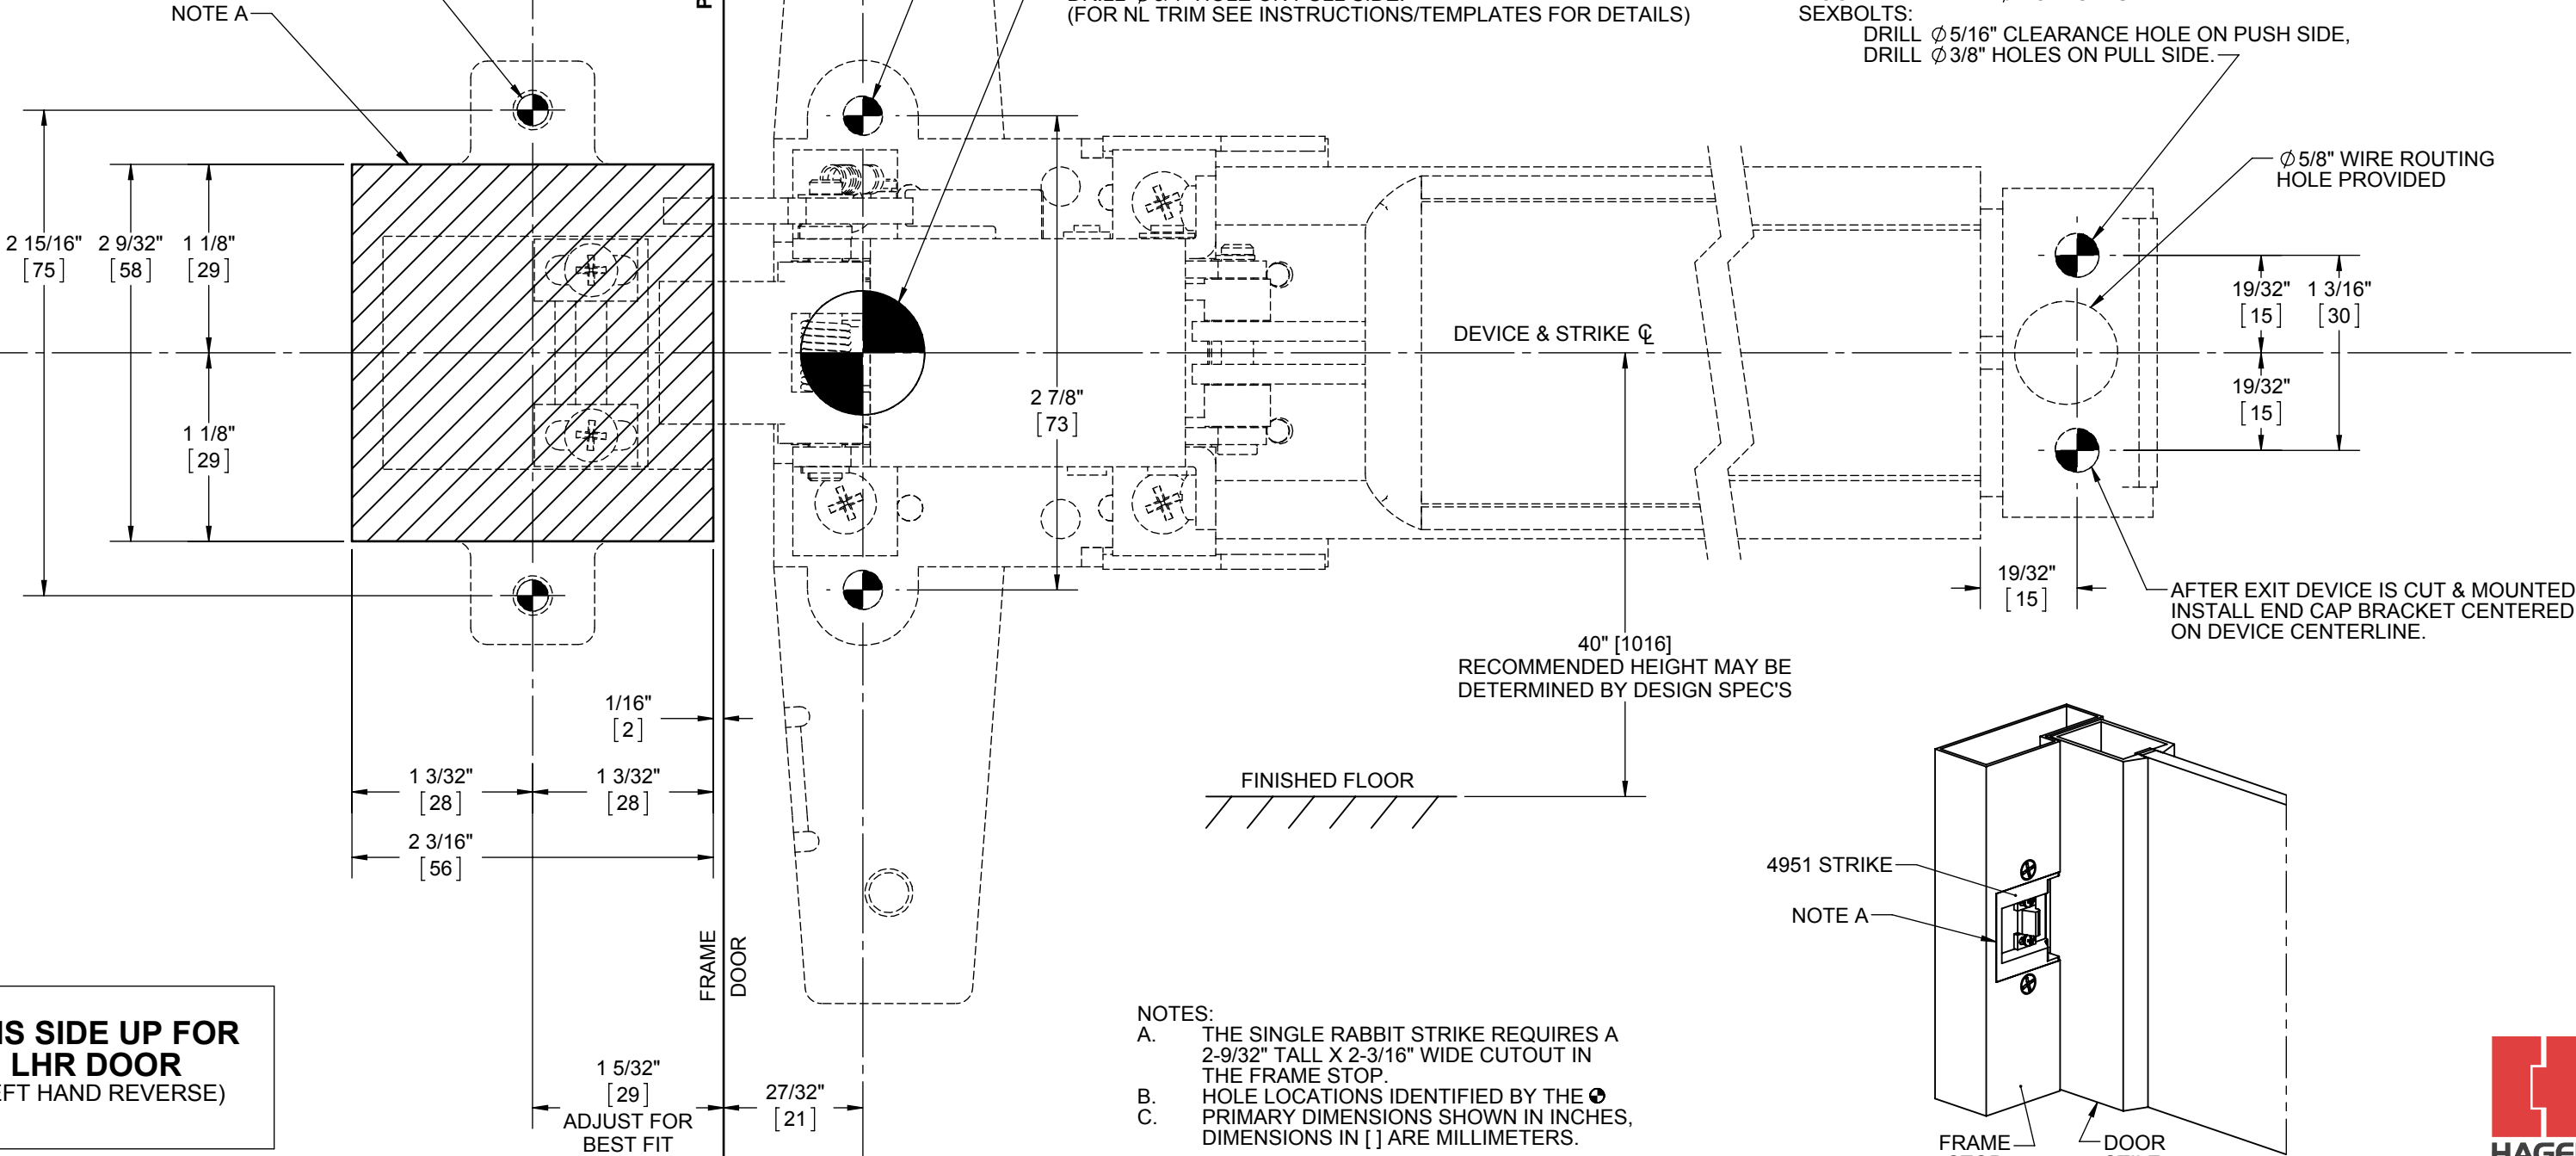

THIS SIDE UP FOR LHR DOOR
 (LEFT HAND REVERSE)

NOTES:
 A. THE SINGLE RABBIT STRIKE REQUIRES A 2-9/32" TALL X 2-3/16" WIDE CUTOUT IN THE FRAME STOP.
 B. HOLE LOCATIONS IDENTIFIED BY THE Ⓢ.
 C. PRIMARY DIMENSIONS SHOWN IN INCHES, DIMENSIONS IN [] ARE MILLIMETERS.

