






### 739 Press-On Weatherstripping Installation Instructions

6500-8034 / I-TW00286 | Rev. 1, 12.05.17

- > Retards spread of flames, smoke, and hot gases
- > Excellent resistance to ozone, sunlight, and oxidation
- > Maintains excellent flexibility at low temperatures and resists high heat

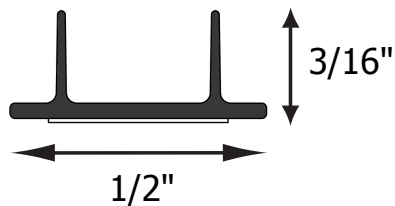

#### Finish

- Brown (B)     Clear (C)

#### Length

- |  |  |  |
|--|--|--|
| <input type="checkbox"/> 17'<br>(5.182m) | <input type="checkbox"/> 18'<br>(5.486m) | <input type="checkbox"/> 19'<br>(5.791m) |
| <input type="checkbox"/> 20'<br>(6.096m) | <input type="checkbox"/> 21'<br>(6.40m)  | <input type="checkbox"/> 22'<br>(6.705m) |

#### Silicone

Store weatherstrip in original packaging at ambient conditions 64°F (18°C) to 76°F (24°C).

CATEGORY J & H - Smoke & Draft Control Gaskets  
 Gaskets for installation with listed wood or mineral core fire doors with listed steel or wood fire door frames, and listed steel or wood fire doors with listed steel fire door frames.  
 20m, 45m, 60m, 90m & 3h Smoke & Draft Control  
 4'0" x 10'0" Single or 8'0" x 10'0" Double Door Applications



## 739 PRESS-ON WEATHERSTRIP

Hager Companies  
 139 Victor Street  
 St. Louis, MO 63104