
TRICON - FULL MORTISE TEMPLATE HINGES ELETRIC THROUGH WIRE TYPE ETW

SIZES: 4 1/2 x 4, 4 1/2 x 4 1/2

Template No. T522 Rev. '96





AMPERES
3.5A CONTINUOUS CURRENT
16.0A CURRENT INRUSH
(300 MILLISECONDS)


DRILLING INSTRUCTIONS


NOTE A:

DRILL AND DEBURR Ø 1" HOLE IN FRAME REINFORCEMENT FOR THROUGH WIRES.

NOTE B:

- 1. NON-HANDED INSTALLATION-DRILL AND DEBURR TWO (2) Ø 3/4" HOLES IN DOOR REINFORCEMENT PLATE FOR THROUGH WIRES.
- RIGHT HAND INSTALLATION— DRILL AND DEBURR Ø 3/4" HOLE FOR THROUGH WIRES IN DOOR REINFORCEMENT PLATE ON BOTTOM LEFT.
- 3. LEFT HAND INSTALLATION—
 DRILL AND DEBURR Ø 3/4" HOLE
 FOR THROUGH WIRES IN
 DOOR REINFORCEMENT
 PLATE ON UPPER RIGHT.

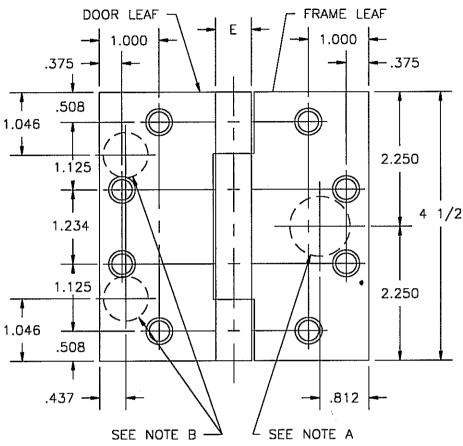

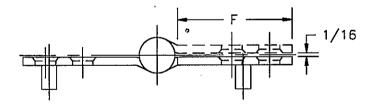

-DO NOT SCALE-

CATALOG NUMBER		11.00 10			EDGE OF LEAF TO
STEEL HINGES	NON- FERROUS HINGES	METAL GAUGE	(E) KNUCKLE DIAMETER	SWAGE LINE 4 1/2 x 4	4 1/2 x 4 1/2
AB700-ETW	AB800-ETW	.134	39/64	1 5/8	1 7/8
AB750-ETW	AB850-ETW	.180	45/64	1 9/16	1 13/16

ALL DIMENSIONS ARE IN INCHES.

Machine Screw Size- $12-24 \times 1/2$ " F.H. Wood Screw Size- No. $12 \times 1 \cdot 1/4$ " F.H.



NOTE: This hinge is intended to be used in the center position.

Hospital type and round corner template hinges conform to the above screw size and location. They are designated by "HT" and "RC" to catalog number.

Hager template hinges are made in size, gauge and with screw holes located to conform to ANSI—A156.7.

HAGER RESERVES THE RIGHT TO MAKE DESIGN CHANGES WITHOUT NOTICE. CALL HAGER ENGINEERING AT 1-800-325-9995 FOR LATEST REVISION DATE OF TEMPLATE. HAGER COMPANIES
139 VICTOR STREET
P.O. BOX 12300
ST. LOUIS, MISSOURI 63157-0300